

WOOD PELLETS

# BioWIN

THE SIMPLE AND  
CONVENIENT SOLUTION

windhager

HOPPER LOAD 441LB -  
UP TO 14 DAYS OPERATING TIME

INFOWIN OPERATING MODULE -  
STATUS AND CLEANING INFORMATION

FOOTPRINT ONLY 16 Square Feet

FULLY AUTOMATIC CLEANING FUNCTION



Residential Wood Pellet Boiler  
Rated output: 51, 72, 88 kBTU/hr





# BioWIN

PROVIDING QUALITY AND EFFICIENCY IN A LITE FORMAT



- Hand fed appliance
- Modulating output
- Quiet operation
- Long life ignition
- System control options
- Comprehensive Support and Customer Service

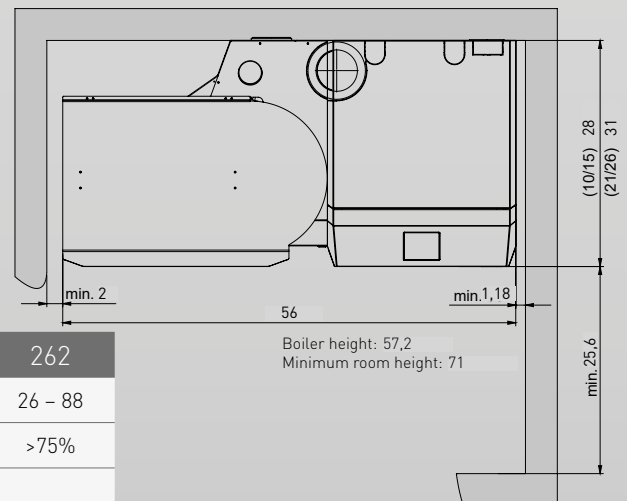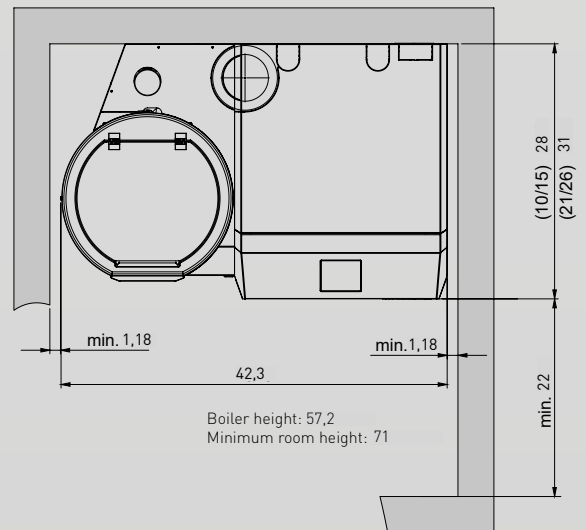

BioWIN		152	212	262
Rated thermal output range	kBTU/hr	15 – 51	21 – 72	26 – 88
Boiler efficiency at nominal load		>75%	>75%	>75%
Pellet hopper capacity options	kg lb	107 / 200 236 / 441		
Total weight (incl. hopper)	kg lb	247 / 300 545 / 661	269 / 322 586 / 710	
Weight of boiler body	kg lb	186 410	207 456	
Minimum weight of main boiler body	kg lb	156 344	177 390	
Flue gas connection diameter	mm in	130 5,1		
Power consumption part load / nominal load	W	18 / 33	19,6 / 41,2	21 / 48